

# LEAKAGE DETECTION ROPE

---

Compact size, high reliability, long service life



## ► Leakage Detection Rope

---


The leakage detection rope LDR01-A is a single-loop, non-locating leakage detection product that includes a cable and controller. It can detect the presence of water at any position along the cable, and the control side interface is compatible with the fan interface. Once water is detected, an alarm will be triggered. The water leakage sensing cable adopts conductive polymerization technology, and it is made of fluoropolymer material, which have strong mechanical performance, corrosion resistance, and abrasion resistance. LDR01-A is ideal for data centers.

## ▶ Product Features

- ◆ The server motherboard side interface is compatible with the fan interface
- ◆ Compact size, high reliability, long service life
- ◆ The design can meet CE/UL certification requirements and comply with EU RoHs directives



## ▶ Leakage status indicator light

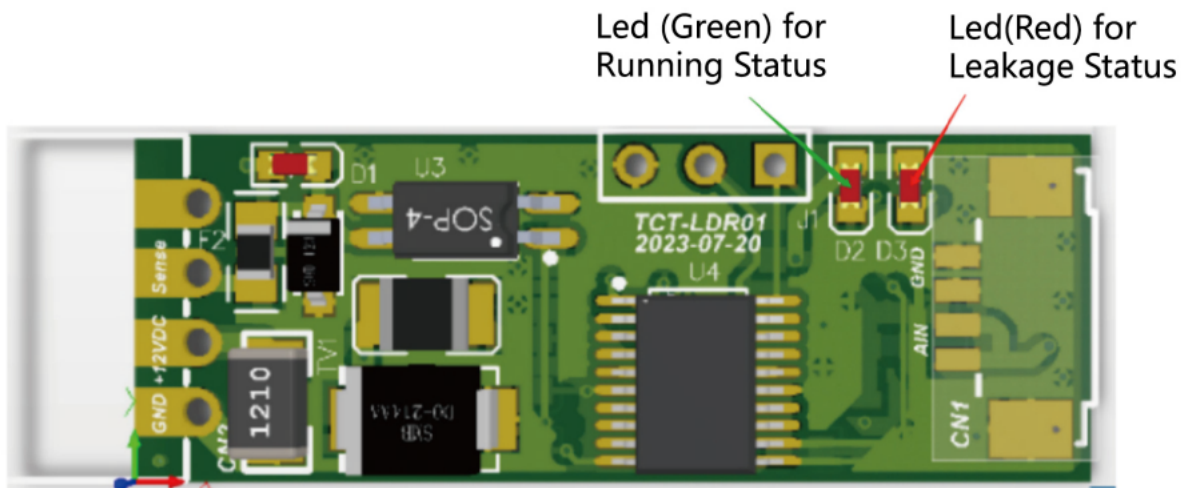

Led(Green) for Running Status	Flash (1Hz)	Normal
	Other	Error

Led(red) for Leakage Status	Flash (5Hz)	Normal
	Constant Light	Leakage
	Constant Extinction	Rope not inserted properly or it' s broken

## ▶ Product Specifications

---

	Items	Specifications
Application Environment	Power	DC12V±10%
	Power Consumption	<200mW
	Operating Environment	-20~70°C; 5%~95%RH
Leakage Detection	Detection Range	Leakage Equivalent Resistance < 255 kohm
	Sense Interface	Open Collector Output
Product Structure	Dimension	Controller: 35 * 12.7 mm Cable < 50 m
	Net Weight	≤ 20 g
	Interface Specifications	Control Side: 4Pin (Spacing 2.54 mm) Cable Side: 4Pin (Spacing 1.27 mm)

**Thermal Control Technology (Shenzhen) Co., Ltd.**

---

Address: Building 14, No.3 Yongtai Road, Tangxia Town.

Dongguan, Guangdong Province

Web: <https://www.thermalct.com/>

E-Mail: [Jack.hu@thermalct.com](mailto:Jack.hu@thermalct.com)

TEL: +86-18926523873



Scan and follow us